



UPPER PANEL REMOVAL/INSTALLATION

1. Disconnect the negative battery terminal. (See NEGATIVE BATTERY TERMINAL DISCONNECTION/CONNECTION [(E)].)
2. Open the console lid.
3. Move the upper panel component in the direction of the arrow shown in the figure and detach the clips, hooks, and guides.

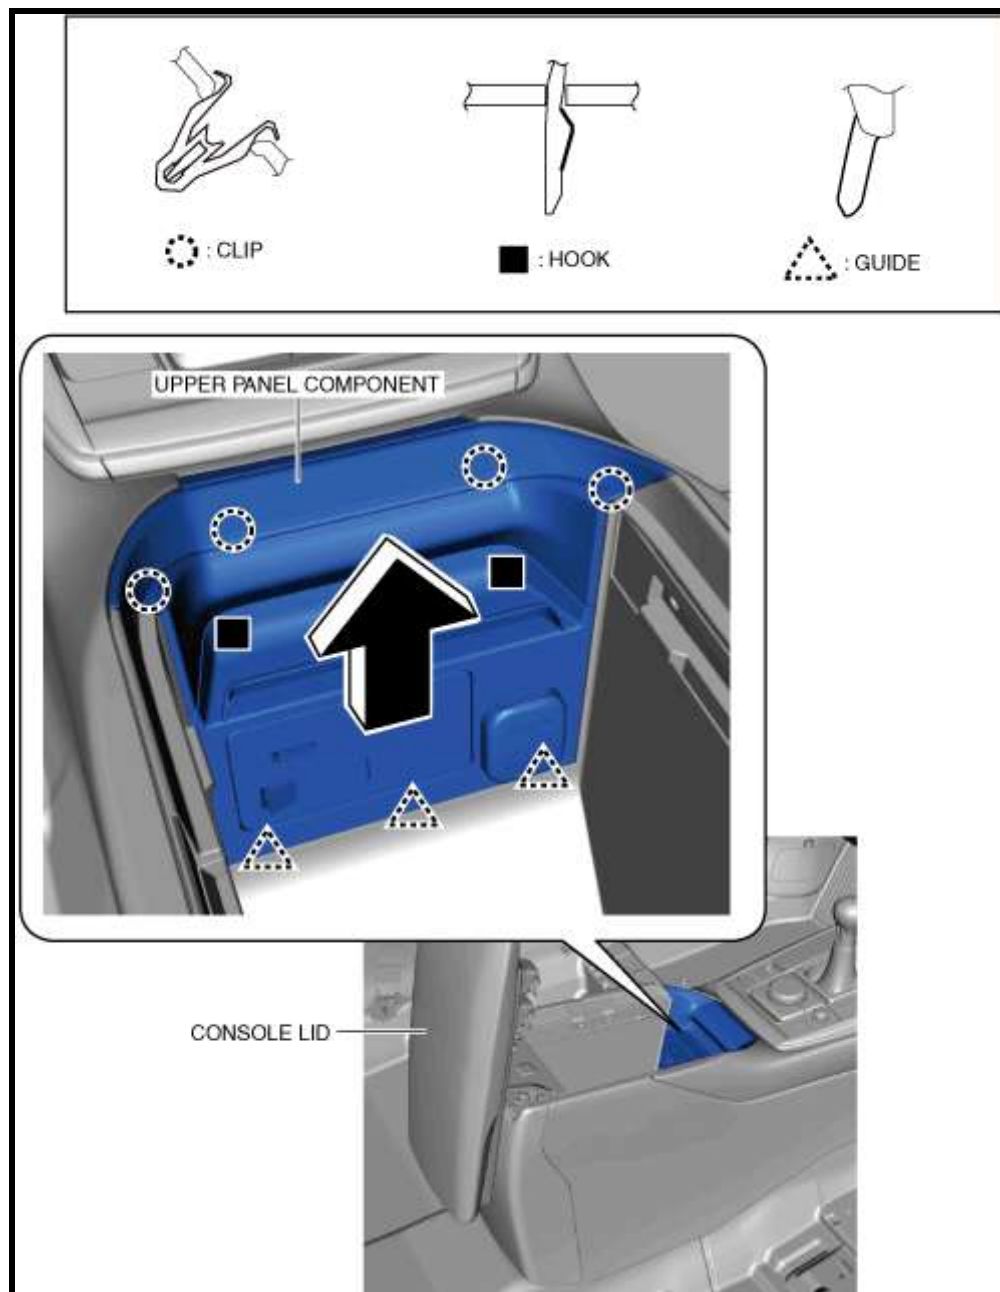


4. Insert a hand at the back of the upper panel and detach the clip at the position shown in the figure, and remove the upper panel from the console-up.

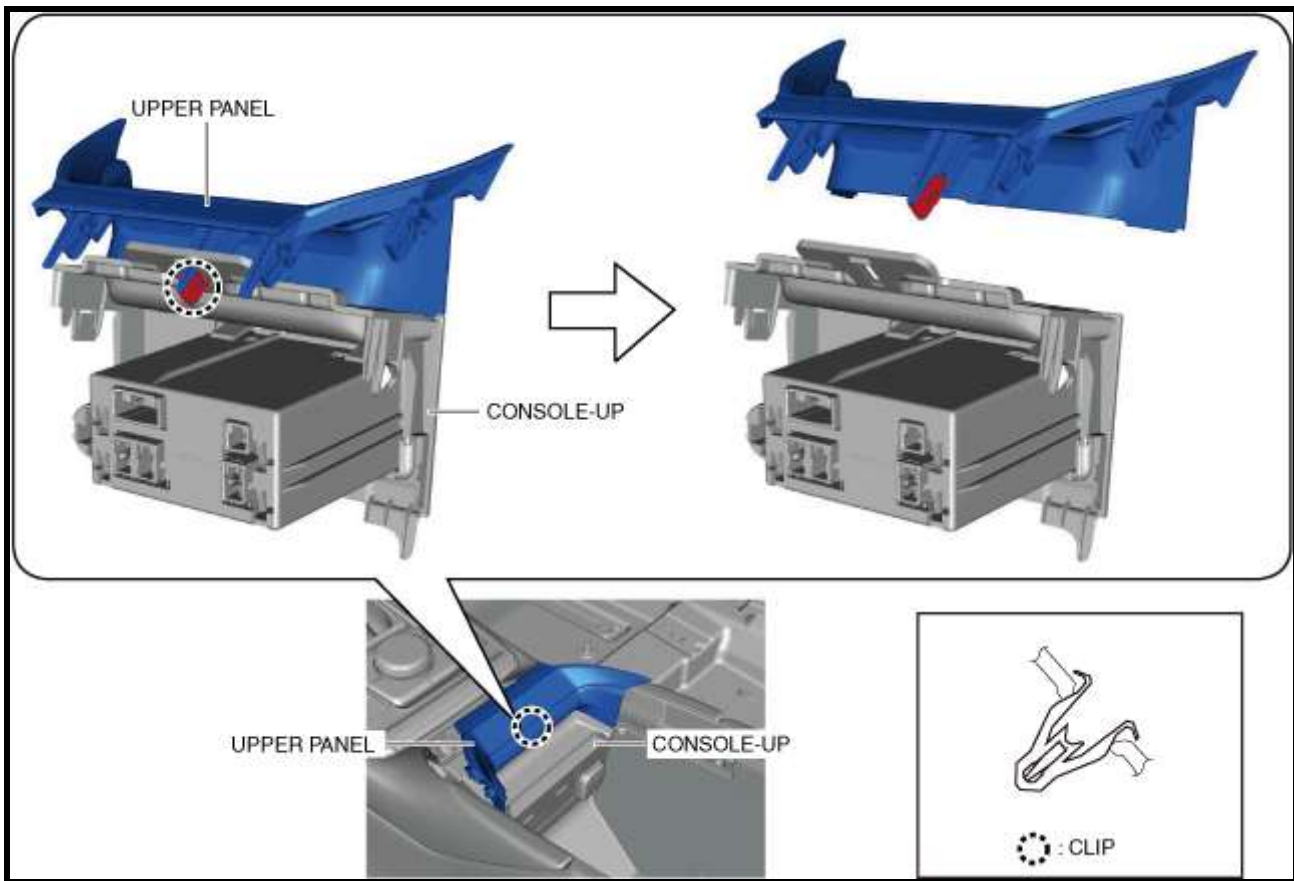

5. When removing the console-up, perform the following procedure:

(1) Disconnect the connector.

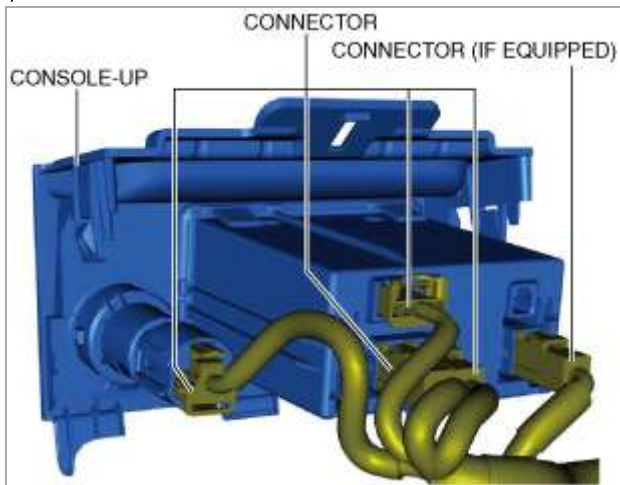

(2) Remove the console-up.

6. Install in the reverse order of removal.